

FIG 1

(a) IPShuttle <-----> IPRelay <----- PBX/KTS  
call dial tone  
established

(b) IPShuttle <-----> IPRelay <-----> PBX/KTS  
press hookflash  
and then #

(c) IPShuttle -----> IPRelay <-----> PBX/KTS  
control message  
via audio channel

(d) IPShuttle <-----> IPRelay -----> PBX/KTS  
hookflash

hookflash = onhook for 200ms and then offhook again

(e) IPShuttle -----> IPRelay -----> PBX/KTS  
user enters  
PBX/KTS access codes

FIG 2

09739082 121500

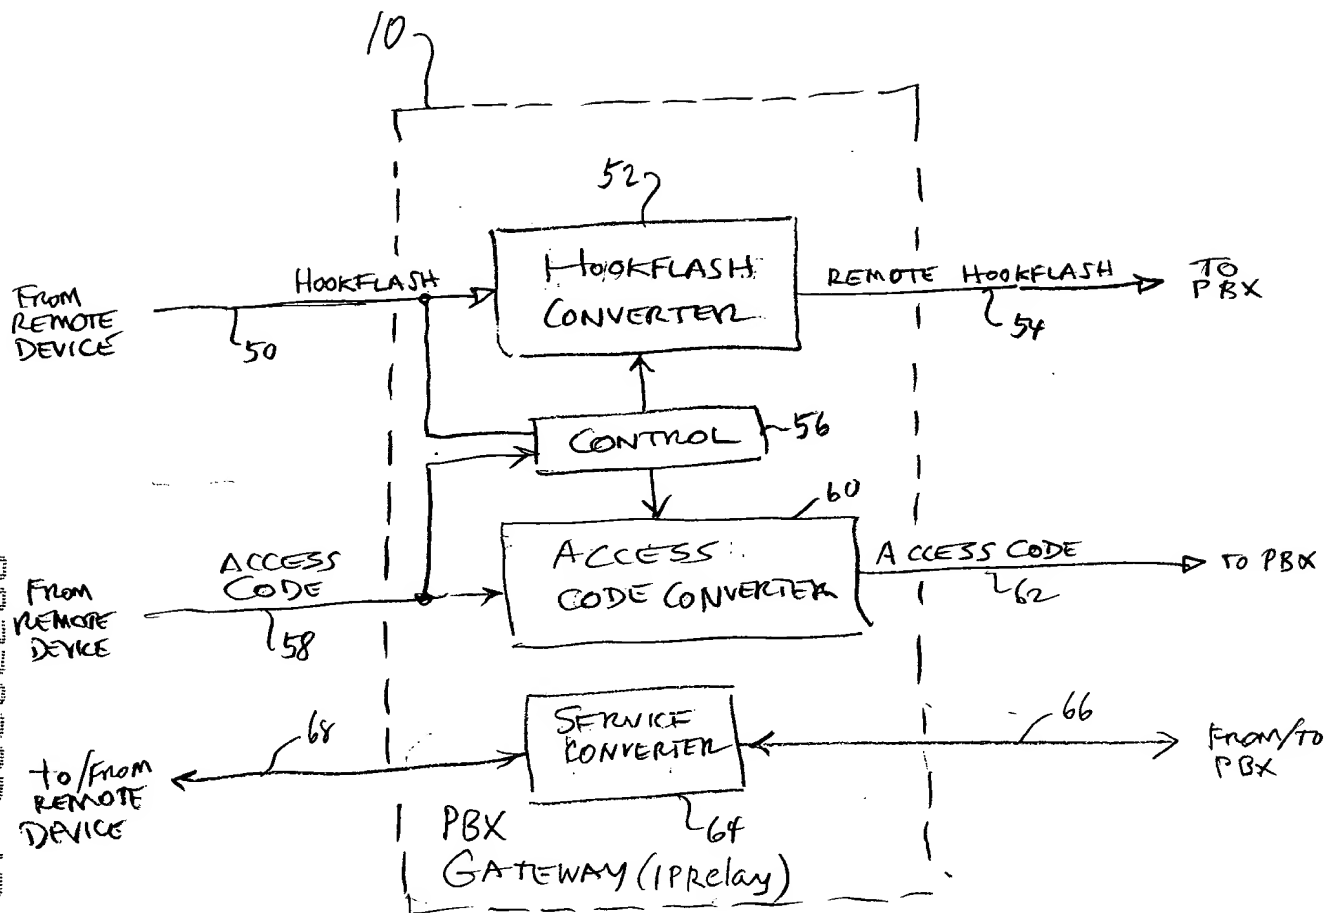


FIG 3